



BROCHADO ROTATORIO · CABEZALES ROTARY BROACHING · TOOLS



POLIPROFILE 2

FUERZA
STRENGTH

< 1780 daN

CAPACIDAD
CAPACITY


■ <8 ◆ <10

+ Características

- Utilizable tanto en torno como en centros de mecanizado
- Minimiza el esfuerzo gracias al sistema oscilatorio
- Rodamientos de alta gama que garantizan una larga vida de la herramienta
- Cuerpo estanco para preservar la durabilidad de los rodamientos
- Ajuste de la posición del punzón mediante un tope regulable situado en el fondo del portabrochas, para mantener la distancia correcta del punzón (cota H)
- Posibilidad de montar un portamatrix para la realización de brochados externos

+ Features

- Usable in all types of lathes and machining centers
- Minimizes broach load thanks to the pendular system
- High quality bearings to ensure a long tool life
- Dust-tight body to prevent chips from entering the bearing area
- Adjustment of the position of the broach by an adjustable stop located at the bottom of the broach holder, to maintain the correct distance of the broach (size H)
- Possibility to fit a die-holder for external broaching

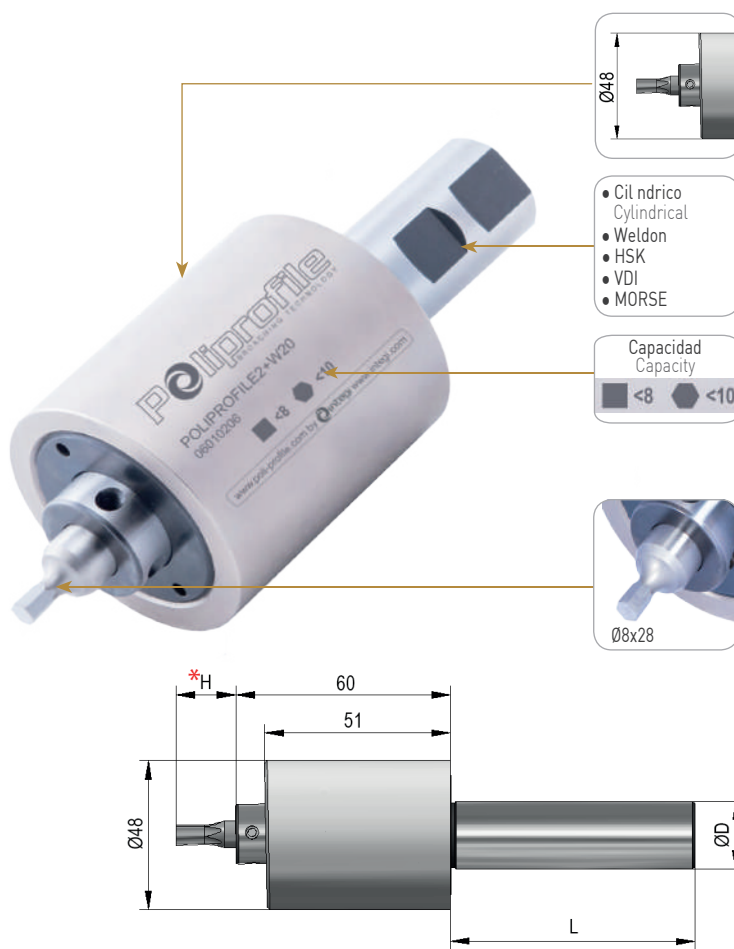

* Importante mantener la distancia correcta del punzón (cota H)
Important to maintain the correct distance of the broach (size H)

Herramienta | Tool

Tipo de mango Shank type	Código Code	Referencia Reference	ØD	*H	L	Kg
	06010203	POLIPROFILE2+C16	16	15	70	0,8
	06010209	POLIPROFILE2+C3/4"	19.05	15	70	1,0
	06010204	POLIPROFILE2+C20	20	15	70	1,0
	06010210	POLIPROFILE2+C22	22	15	70	1,2
	06010205	POLIPROFILE2+W16	16	15	52	0,8
	06010206	POLIPROFILE2+W20	20	15	52	1,0
	06010211	POLIPROFILE2+HSK32-A	10	15	40	2,6
	06010212	POLIPROFILE2+HSK40-A	12	15	40	2,6
	06010207	POLIPROFILE2+VDI20	20	15	-	0,9
	06010208	POLIPROFILE2+VDI30	30	15	-	1,0
	06010201	POLIPROFILE2+M1	MORSE / MK 1	15	K 1	0,9
	06010202	POLIPROFILE2+M2	MORSE / MK 2	15	K 2	1,0

Portamatrix para brochado exterior Die holder for external broaching

Referencia
Reference

POL2-PTM



Punzón | Broach

Referencia
Reference

P-0828

