



BROCHADO ROTATORIO · CABEZALES

ROTARY BROACHING · TOOLS



POLIPROFILE 1

FUERZA
STRENGTH

< 570 daN

CAPACIDAD
CAPACITY


■ <5 ◆ <6

+ Características

- Utilizable tanto en torno como en centros de mecanizado
- Minimiza el esfuerzo gracias al sistema oscilatorio
- Rodamientos de alta gama que garantizan una larga vida de la herramienta
- Cuerpo estanco para preservar la durabilidad de los rodamientos
- Ajuste de la posición del punzón mediante un tope regulable situado en el fondo del portabrochas, para mantener la distancia correcta del punzón (**cota H**)
- Posibilidad de montar un portamatrix para la realización de brochados externos

+ Features

- Usable in all types of lathes and machining centers
- Minimizes broach load thanks to the pendular system
- High quality bearings to ensure a long tool life
- Dust - tight body to prevent chips from entering the bearing area
- Adjustment of the position of the broach by an adjustable stop located at the bottom of the broach holder, to maintain the correct distance from the broach (**size H**)
- Possibility to fit a die-holder for external broaching

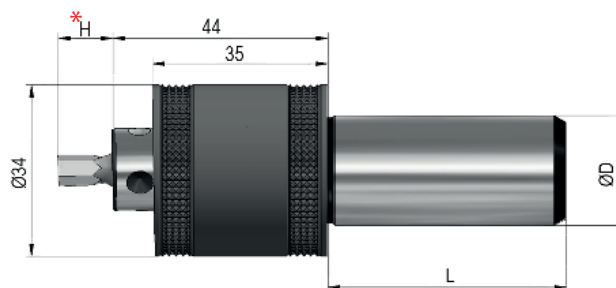

* Importante mantener la distancia correcta del punzón (**cota H**)
Important to maintain the correct distance of the broach (**size H**)

Herramienta Tool						
Tipo de mango Shank type	Código Code	Referencia Reference	ØD	H	L	Kg
	06010106	POLIPROFILE1+C10	10	15	40	0,3
	06010104	POLIPROFILE1+C12	12	15	40	0,3
	06010103	POLIPROFILE1+C16	16	15	70	0,4
	06010102	POLIPROFILE1+C3/4"	19.05	15	70	0,5
	06010107	POLIPROFILE1+C20	20	15	70	0,5
	06010112	POLIPROFILE1+C2040	20	15	40	0,4
	06010111	POLIPROFILE1+C22	22	15	70	0,5
	06010113	POLIPROFILE1+C2240	22	15	40	0,5
	06010114	POLIPROFILE1+C2540	25	15	40	0,5
	06010109	POLIPROFILE1+W10	10	15	41	0,3
	06010108	POLIPROFILE1+W12	12	15	46	0,3
	06010105	POLIPROFILE1+W16	16	15	49	0,3
	06010110	POLIPROFILE1+W20	20	15	51	0,5

Portamatrix para brochado exterior
Die holder for external broaching

Referencia Reference	
POL1-PTM	

Punzón | Broach

Referencia Reference	
P-0828	